


STRAIGHT WARP
SINGLE / DUAL UNIT

Price RUBBER CORP.

PRICE FLEX

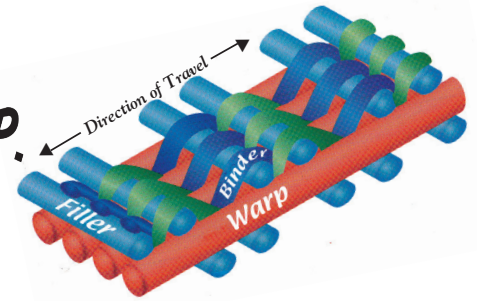

C
O
M
P
O
U
N
D
S

SBR (STYRENE BUTADIENE RUBBER)

	TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO/HARDNESS	DIN ABRASION	SPECIFIC GRAVITY
21	3050	580	1500	-40 / 220°F.	64 ± 5	110	1.14
22	2400	640	1100	-40 / 220°F.	60 ± 5	120	1.14
29	3000	630	1300	-40 / 220°F.	65 ± 5	85	1.14
35	2000	500	1100	-40 / 220°F.	65 ± 5	135	1.35

CARCASS: STRAIGHT WARP (POLY, POLY, NYLON)

PRC *13:1 Safety	PRICE FLEX I SINGLE UNIT		PRICE FLEX II DUAL UNIT	
	1 / 330	1 / 440	2 / 660	2 / 880
Fabric Type	PPN	PPN	PPN	PPN
Vulcanized & Fastener Rating (piw)	330	440	660	800
Carcass Gauge (in.)	.14	.15	.27	.30
Carcass Weight (lbs/sq.ft.)	.52	.53	1.35	1.49
Approx 1/32 cover wt (lbs/sq.ft.)	.18	.18	.18	.18
Avg. Permanent Elongation (%)	1.7%	1.7%	1.7%	1.7%
Elastic modulus (piw)	33,000	35,000	66,000	70,000
TROUGHABILITY (Minimum Belt Width) (in.)				
PRC	1 / 330	1 / 440	2 / 660	2 / 880
20 degree idlers	18	18	24	30
35 degree idlers	24	24	30	36
45 degree idlers	24	30	36	42
MINIMUM PULLEY DIAMETERS (in.)				
PRC	1 / 330	1 / 440	2 / 660	2 / 880
Over 80% Tension	18	20	24	30
60% to 80% Tension	16	18	20	24
LOAD SUPPORT *(Max. Belt Width/35° Troughers) (in.)				
PRC	1 / 330	1 / 440	2 / 660	2 / 880
0 - 40 lbs/cu.ft.	66	72	84	90
41-80 lbs/cu.ft.	54	60	78	84
81-120 lbs/cu.ft.	48	54	72	84
Over 120 lbs./cu.ft.	42	48	66	78

Price Rubber fully warrants & guarantees all products against material defect & workmanship for the life of the product. Price Belts are manufactured to width so they run true from the start and Price uses 100% polyester textiles to keep stretch to a minimum! Each & every Price Belt is engineered, custom built, & available in either smooth or textured finishes for job-matched performance. Experience the Price Advantage . . . Value that Lasts!



Price RUBBER CORP.



FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER DISTRIBUTOR OR CALL PRC CUSTOMER SERVICE:
WATTS: (800) 633-1470 • FAX: (334) 271-3194
www.pricerubber.com