

STOCK # **22**
 GRADE II X-TRA
 WATER SUCTION

Price Rubber Corp.

S-75 ROUGH NECK

COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 220°	60 ± 5	1.14

CARCASS / 100% POLYESTER – (PLAIN WEAVE, WARP & FILL)
 CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.

S-75

COLOR / SERVICE: Black-High Abrasion Weather Resistance.


TUBE: SBR of 1/8", 1/4", 3/8" Thicknesses.

REINFORCEMENT: Multiple Plies of 110 lb. Polyester Fabric with a Galvanized Steel Spring Wire.

COVER: SBR 1/16" Thick.

PACKAGING: 10' Min. / 30' Max. with Plain Ends:

BRANDING: No Brand.

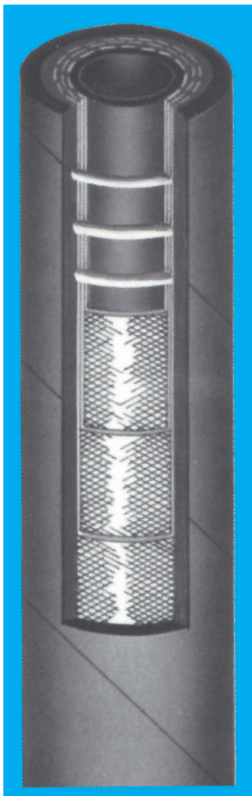

<i>PRC</i>	ID	Ply	OD	WP	Bending Radius	Wt / Ft	Wire OAG
	4"	2	4.8"	60	36"	2.6	.110
	5"	2	5.8"	50	48"	3.2	.110
	6"	2	6.8"	40	60"	3.8	.110
	8"	3	9.1"	30	72"	6.7	.148
	10"	4	11.3"	25	84"	10.1	.148
	12"	5	13.5"	20	96"	13.8	.148

Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:
 WATTS: (800) 633-1470 • FAX: (334) 271-3194
www.pricerubber.com