

STOCK # **22**
 GRADE II X-TRA
 HEAVY DISCHARGE
 SERVICE


Price Rubber Corp.

P-14 WATER DISCHARGE COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 180°	60 ± 5	1.14

**CARCASS / 100% POLYESTER – (PLAIN WEAVE, WARP & FILL)
 CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.**

P-14

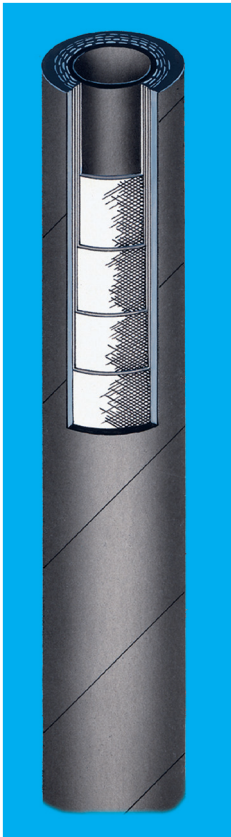

COLOR / SERVICE: Black-Ideal for Construction Sites Requiring Higher Working Pressures. High Abrasion Weather Resistance.

TUBE: SBR of 1/8", 1/4", 3/8" Thicknesses.

REINFORCEMENT: Multiple Plies of 110 lb. Polyester Fabric.

COVER: SBR 1/16" Thick.

PACKAGING: 10' Min. / 30' Max. with Plain Ends:

BRANDING: No Brand.

ID	Ply	WP
4"	4	150
5"	4	150
6"	4	125
8"	4	100
10"	5	100
12"	6	100

Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:
 WATTS: (800) 633-1470 • FAX: (334) 271-3194
www.pricerubber.com