

STOCK # 22

GRADE II X-TRA  
WATER SUCTION

# Price Rubber Corp.

## S-75 ROUGH NECK

COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 220°	60 ± 5	1.14

CARCASS / 100% POLYESTER – (PLAIN WEAVE, WARP & FILL)

CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.

S-75

**COLOR / SERVICE:** Black-High Abrasion Weather Resistance.


**TUBE:** SBR of 1/8", 1/4", 3/8" Thicknesses.

**REINFORCEMENT:** Multiple Plies of 110 lb. Polyester Fabric with a Galvanized Steel Spring Wire.

**COVER:** SBR 1/16" Thick.

**PACKAGING:** 10' Min. / 30' Max. with Plain Ends:

**BRANDING:** No Brand.

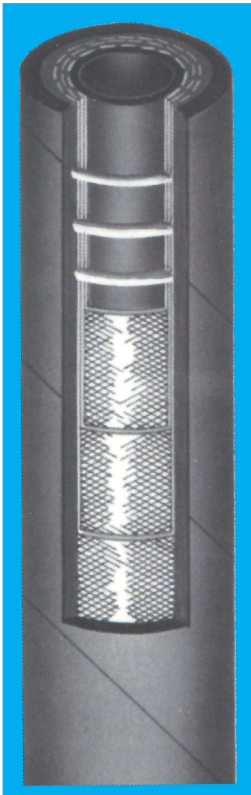

<i>PRC</i> ID	Ply	OD	WP	Bending Radius	Wt / Ft	Wire OAG
4"	2	4.8"	60	36"	2.6	.110
5"	2	5.8"	50	48"	3.2	.110
6"	2	6.8"	40	60"	3.8	.110
8"	3	9.1"	30	72"	6.7	.148
10"	4	11.3"	25	84"	10.1	.148
12"	5	13.5"	20	96"	13.8	.148

# Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:

WATTS: 888-778-7707 • FAX: 334-279-5603

www.pricerubber.com