

STOCK # **22**
 GRADE II X-TRA
 TOUGH DUTY SUCTION

Price Rubber Corp.

S-110 WATER SUCTION

COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 220°	60 ± 5	1.14

CARCASS / 100% POLYESTER – (PLAIN WEAVE, WARP & FILL)

CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.

S-110


COLOR / SERVICE: Black - For Contractor and Agricultural Applications.

TUBE: SBR of 1/16", 1/8", 3/16" Thicknesses.

REINFORCEMENT: Multiple Plies of 110 lb. Polyester Fabric with a Medium Steel Spring Helical Wire.

COVER: SBR 1/16" Thick.

***BRANDING:** *Price* RUBBER CORP. S-110 WATER SUCTION 100 psi Made in USA

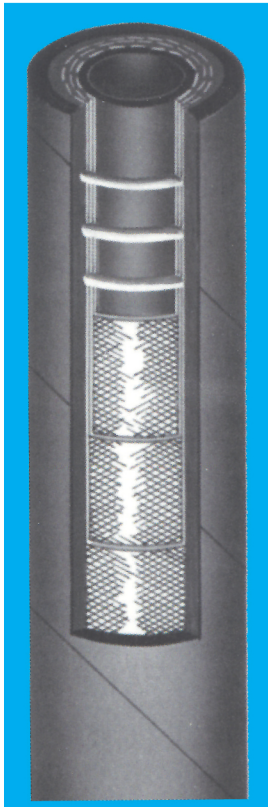

<i>PRC</i>	ID	Ply	OD	WP	Bending Radius	Wt / Ft	Wire OAG
	4"	3	5.1"	150	44"	3.5	.110
	5"	3	6.1"	150	56"	4.3	.110
	6"	3	7.2"	125	66"	5.6	.110
	8"	4	9.4"	100	82"	8.8	.148
	10"	5	11.7"	100	96"	13.1	.177
	12"	6	13.9"	100	108"	17.7	.177

Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:

WATTS: 888-778-7707 • FAX: 334-279-5603

www.pricerubber.com