


STOCK # **22**
 GRADE II X-TRA
 EXTREME DISCHARGE
 SERVICE

Price Rubber Corp.

P-7

P-7 DREDGE SLEEVES

COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

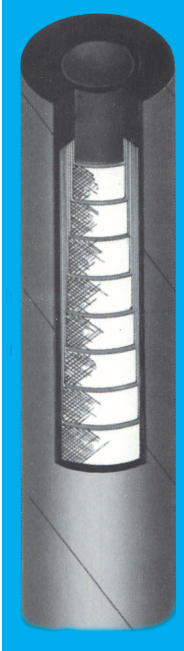

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 220°	60 ± 5	1.14

CARCASS / 100% POLYESTER – (PLAIN WEAVE, WARP & FILL)
CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.


COLOR / SERVICE: Black - Used as a Flexible Connector Between Sections of Pipe in Dredging Operations.

TUBE: SBR of 3/8", 1/2", 3/4", 1" Thicknesses.

REINFORCEMENT: Multiple Plies of 110 lb. Polyester Fabric.

COVER: SBR 1/16" Thick.

PACKAGING: No Min. / 30' Max. with Straight Ends.

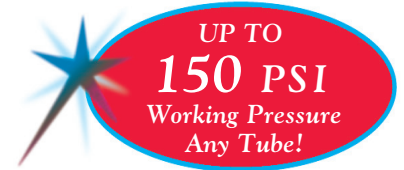

***BRANDING:**

Price RUBBER CORP. P-7 DREDGE SLEEVE 150 psi **Made in USA**



* **Factory Stocked in 12' "Sticks" by 3/8" & 1/2" Wear Tubes!**

PRC		3/8" Tube		1/2" Tube		3/4" Tube	
ID	PLY	Wt/Ft	OD	Wt/Ft	OD	Wt/Ft	OD
4 1/2"	3	5.3	6.0	6.2	6.3	7.9	6.8
6 5/8"	4	9.0	8.3	10.3	8.6	12.9	9.1
8 5/8"	4	13.1	10.6	14.8	10.8	18.2	11.3
10 3/4"	5	18.1	12.9	20.2	13.1	24.4	13.6
12 3/4"	6	23.6	15.1	26.1	15.4	31.1	15.9
14"	7	28.3	16.6	31.0	16.8	36.5	17.3
16"	8	35.0	18.8	38.1	19.0	44.4	19.5
18"	9	42.3	21.0	45.9	21.2	53.0	21.5
20"	10	49.8	23.3	53.9	23.5	62.0	23.8

Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:

WATTS: (800) 633-1470 • FAX: (334) 271-3194

www.pricerubber.com