

STOCK # **22**  
 GRADE II X-TRA  
 GRAVITY FLOW

# Price Rubber Corp.


## P-12 ELEPHANT TRUNK

COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 220°	60 ± 5	1.14

**CARCASS / 100% POLYESTER – ( PLAIN WEAVE, WARP & FILL)**  
**CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.**

**P-12**

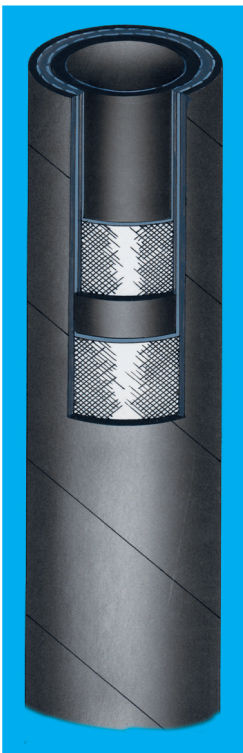

**COLOR / SERVICE:** Black - Gravity Flow Transfer of Dry Bulk Materials.

**TUBE:** SBR of 1/16", 1/8", 3/16" Thicknesses.

**REINFORCEMENT:** Multiple Plies of 110 lb. Polyester Fabric.

**COVER:** SBR 1/16" Thick.

**PACKAGING:** 10' Min. / 30' Max. with Plain Ends.

**BRANDING:** No Brand.



**GRAVITATIONAL FLOW...  
 LIGHTWEIGHT & FLEXIBLE!**

PRC Standard Construction:  
 1/8" Tube x 2 Ply 220 lb. x 1/16" Cover

ID	4"	6"	8"	10"	12"	14"	16"	18"	20"
Ga.	1/4" / .250" Wall Thickness x 1/8" Tube.								
Lgth.	← 30' Max. Length →				← 20' Max. Length →				

\*Mandrel Constructed, Wet-Taped / Shrink-Wrapped and Auto-Clave Cured.

Other Diameters Available Upon Request:

4-1/2" 5" 6-5/8" 8-5/8" 8-3/4" 10-3/4" 11" 12-3/4" 13" 13-3/8"

# Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:  
 WATTS: (800) 633-1470 • FAX: (334) 271-3194  
 www.pricerubber.com