

STOCK # 22

GRADE II X-TRA
GRAVITY FLOW

Price Rubber Corp.

P-12 ELEPHANT TRUNK


COMPOUND / SBR - (STYRENE BUTADIENE RUBBER)

TENSILE (PSI)	ELONGATION (%)	MODULUS (300%)	TEMP. RATING	DURO (HARDNESS)	SPEC. GRAVITY
2400	640	1100	-40 / 220°	60 ± 5	1.14

CARCASS / 100% POLYESTER – (PLAIN WEAVE, WARP & FILL)

CONSTRUCTION: HAND BUILT, MANDREL WRAPPED.

P-12

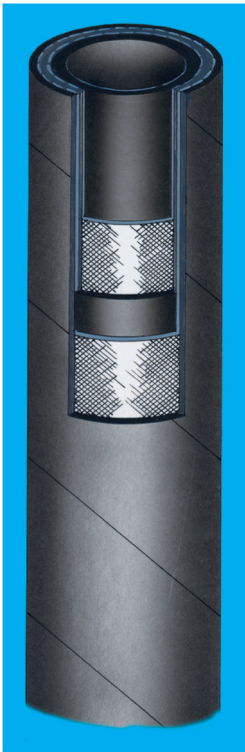

COLOR / SERVICE: Black - Gravity Flow Transfer of Dry Bulk Materials.

TUBE: SBR of 1/16", 1/8", 3/16" Thicknesses.

REINFORCEMENT: Multiple Plies of 110 lb. Polyester Fabric.

COVER: SBR 1/16" Thick.

PACKAGING: 10' Min. / 30' Max. with Plain Ends.

BRANDING: No Brand.



**GRAVITATIONAL FLOW...
LIGHTWEIGHT & FLEXIBLE!**

PRC Standard Construction:

1/8" Tube x 2 Ply 220 lb. x 1/16" Cover

ID	4"	6"	8"	10"	12"	14"	16"	18"	20"
Ga.	1/4" / .250" Wall Thickness x 1/8" Tube.								
Lgth.	← 30' Max. Length →				← 20' Max. Length →				

*Mandrel Constructed, Wet-Taped / Shrink-Wrapped and Auto-Clave Cured.

Other Diameters Available Upon Request:

4-1/2" 5" 6-5/8" 8-5/8" 8-3/4" 10-3/4" 11" 12-3/4" 13" 13-3/8"

Price Rubber Corp.

FOR MORE INFORMATION, CONTACT YOUR LOCAL PRICE RUBBER CUSTOMER SERVICE:

WATTS: 888-778-7707 • FAX: 334-279-5603

www.pricerubber.com